

INSTRUCTION



SPINE CORRECTOR

PTX1700

liveness



Component:

When you open package, you will find:



No.	Item	Quantity
1	Spine corrector	1
2	Oak rod	1

Assembly:

Warning: the main box for the reformer weighs around 13kg so it is required to unpack the equipment and correct lifting technique should be used. At all times you are responsible for your own safety and those around you.

Please unpack the equipment in a clear, clean & dry environment on a

level floor surface. And follow the steps below to operate.

Assemble oak rod:

Please take out each product from the wooden box and place them on a flat surface.



Product Introduction:



Cleaning and Maintenance:

Daily Cleaning

After each use, gently wipe the surface of the equipment, including the sliding bed, headrest, shoulder pads, sliding rails, and other parts, with a clean and soft damp cloth to remove sweat, dust, and stains. Avoid using rough cleaning tools to prevent scratching the surface of the equipment.

Deep Cleaning

Conduct deep cleaning of the equipment at regular intervals (it is recommended to do it once a month). You can use a mild neutral cleaner, dilute the cleaner in warm water, dip a soft cloth into the solution to wipe the equipment, then rinse it thoroughly with clean water, and finally dry it with a dry cloth. Pay special attention to cleaning the pulleys and sliding rails to ensure that there is no debris accumulation, so as to maintain the smooth operation of the equipment.


Storage Environment

When the equipment is not in use, store it in a dry and well ventilated place, away from direct sunlight and humid environments.

Prolonged exposure to sunlight may cause the materials of the
equipment to age and fade, and a humid environment may cause
metal parts to rust, affecting the service life of the equipment.

Parts Maintenance

Regularly inspect all components of the equipment, such as whether the pulleys rotate flexibly, whether the springs are deformed or broken, and whether the connection parts are loose. For the pulleys, you can appropriately add lubricating oil to keep them rotating smoothly; if there are problems with the springs, replace them with springs of the same specifications in a timely manner to ensure the performance and safety of the equipment. At the same time, check whether the buffer cylinders of the folding buffer group are working properly. If there are any abnormalities, do not continue to use the equipment and contact professional maintenance personnel for inspection and repair.

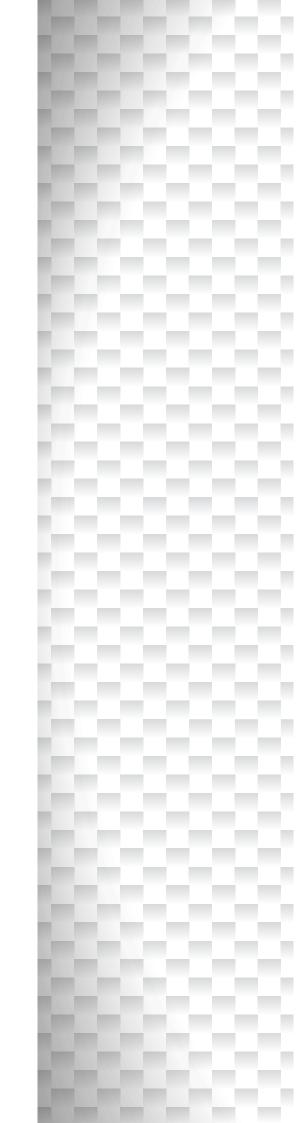

Garlando

GARLANDO SPA

Via Regione Piemonte, 32 - Zona Industriale DI
I 5068 - Pozzolo Formigaro (AL) - Italy

www.toorxprofessional.it

contact@toorxprofessional.it